

Technical Information Sheet



Rhenofol standing seam profile round

Delivery form	Item Number
1 piece Rhenofol standing seam profile round, 2.00 m	14 80 130
<i>Note: other colors available upon request</i>	

Description

Rhenofol standing seam profile round (length 2.00 m, height 25 mm) is a polymeric profile made of PVC. The Rhenofol joint connectors are included in the delivery (1 piece per 2 m). The Rhenofol standing seam profile can be used on Rhenofol roofing membranes to create an aesthetic imitation of standing seam roofs.



Preparation

Clean the installation area.

Application and processing

The Rhenofol standing seam profile round can be welded onto dry and clean Rhenofol roofing membranes using hot air. It is recommended to position the standing seam profiles at the seam edge of the roof membrane overlap. Weld the Rhenofol standing seam profile round to the roofing membrane using a hot air welding device and the special FDT pressure roller for standing seam profiles (item no. 1288980). The joint connection is made with the appropriate Rhenofol joint connector and Rhenofol solvent welding agent (THF) or Rhenofol paste.

Alternative with Rhenofol paste

The roofing membrane must be dry and free of dust and grease. To apply the paste, it is best to transfer it into a PE bottle (item no. 12 84 120) with a syringe nozzle.


Apply a bead approximately 15 mm wide beneath the profile, insert the profile, and secure it using the pressure roller for standing seam profiles (item no. 12 88 980).

Consumption

1 profile/2 m, 1 joint connector per profile.

Properties

Technical data	Declared value
Color:	light gray or other colors available upon request
Raw material basis:	Rhenofol (PVC)
Density	approx. 1.239 g/cm ³
Shore A hardness:	single values: ≥ 80
Surface	smooth
Profile length:	2 m
Storage conditions:	store profiles horizontally only and protect from moisture

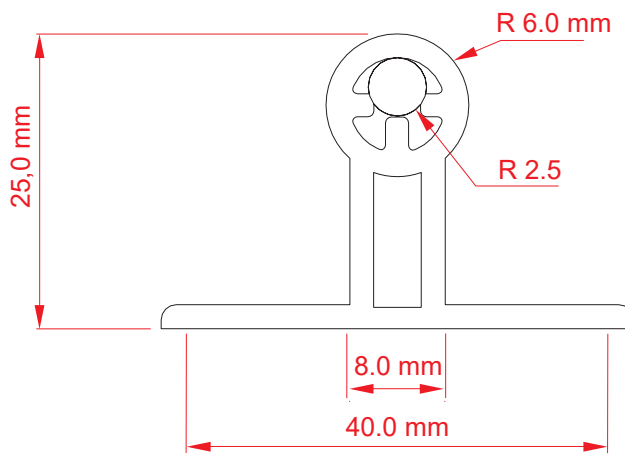

Storage

Keep dry in its original packaging.

Shelf life

Unlimited, provided it is stored correctly.

Packaging and disposal

Disposal codes/Waste code: 170203 (plastics)

Precautions and occupational safety

General safety regulations must be observed. A safety data sheet is not required for this product.

Transport

General safety regulations must be observed.

Please note: As our products are constantly evolving, please contact our technical department or visit www.fdt.de for the latest information on our products.

Legal Notice:

We refer emphatically to the fact, that all details mentioned, especially the application and utilization recommendation for the products and their system accessories, have been developed under normal conditions, and based on our knowledge and experience. Appropriate storage and usage of the products are assumed. A warranty or reliability of a finished project cannot be deduced because of varying materials, substrates and differing work conditions, neither by any indications nor from verbal statements, irrespective of any legal positions. For the possible accusation that FDT acted intentionally or grossly negligent, the user has to supply evidence that they provided FDT with all information and details necessary for an appropriate and correct evaluation through FDT in written form, immediately available and complete. The user is responsible for ensuring that the products are suitable for the given application. It is FDT's right to change product specifications without notice. Property rights of third parties are to be considered. In addition, our particular sales and delivery terms are valid. The latest version of our product data sheet is obligatory, which can be requested directly through FDT. All information as well as all technical and drawing data comply with current technical standards and are based on our experience. National standards and regulations must be observed.

Technical changes reserved. As of 5th January 2026 | © 2026 FDT Flachdach Technologie GmbH, Mannheim, Germany