


Technical Information Sheet

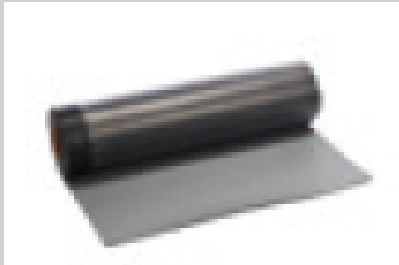

hsg Connecting Strip for Rhepanol hfk

Delivery form	Item Number
1 roll of hsg connecting strips 15.00 m x 0.15 m	17 05 100
1 roll of hsg connecting strips 15.00 m x 0.35 m	17 05 110
1 roll of hsg connecting strips 15.00 m x 0.50 m	17 05 120
1 roll of hsg connecting strips 15.00 m x 0.75 m	17 05 130

Note: For other colours, please refer to the price list/product catalogue

Description

The hsg Connecting Strip is a polyisobutylene (PIB) flashing membrane that is compatible with Rhepanol hfk/hfk-bs roofing membranes.

Application and processing

The hsg Connecting Strips are used as covering strips (e.g. for head joints in Rhepanol hfk/hfk-bs roofing membranes) across the surface and for forming flashings, such as those for parapets and walls.

Clean the roofing membrane and the Rhepanol hsg Connecting Strip in the seam area using Rhepanol h Seam Cleaner and weld the seam tightly using hot-air. The installation instructions in the Rhepanol hfk application manual must be observed.

Properties

The connecting strips are 1.5 mm thick and have a central glass fleece insert. The flashing strips are manufactured in lengths of 15 m and are available in widths from 0.15 m to 0.75 m. Connections with dimensions larger than 0.75 m can be made with Rhepanol hfk/hfk-bs roofing membranes.

Consumption

For head joint connection, a strip 1.50 m long and 0.15 m wide should be used (with a 5 cm overlap at the seams). For connection areas, the consumption depends on the height and width of the area to be connected.

Storage

Store material in the original packaging until installation. Carefully reseal any opened packaging units if they are to be stored outdoors. Store rolls in a horizontal position only. Protect rolls from direct sunlight, rain and snow.

Shelf life

Unlimited, provided it is stored correctly.

Packaging and disposal

Disposal codes/Waste code: 17 02 03 (plastics)

Precautions and occupational safety

General safety regulations must be observed.

Transport

General safety regulations must be observed.

Please note: As our products are constantly evolving, please contact our technical department or visit www.fdt.de for the latest information on our products.

Legal Notice:

We refer emphatically to the fact, that all details mentioned, especially the application and utilization recommendation for the products and their system accessories, have been developed under normal conditions, and based on our knowledge and experience. Appropriate storage and usage of the products are assumed. A warranty or reliability of a finished project cannot be deduced because of varying materials, substrates and differing work conditions, neither by any indications nor from verbal statements, irrespective of any legal positions. For the possible accusation that FDT acted intentionally or grossly negligent, the user has to supply evidence that they provided FDT with all information and details necessary for an appropriate and correct evaluation through FDT in written form, immediately available and complete. The user is responsible for ensuring that the products are suitable for the given application. It is FDT's right to change product specifications without notice. Property rights of third parties are to be considered. In addition, our particular sales and delivery terms are valid. The latest version of our product data sheet is obligatory, which can be requested directly through FDT. All information as well as all technical and drawing data comply with current technical standards and are based on our experience. National standards and regulations must be observed.

Technical changes reserved. As of 5th January 2026 | © 2026 FDT Flachdach Technologie GmbH, Mannheim, Germany